


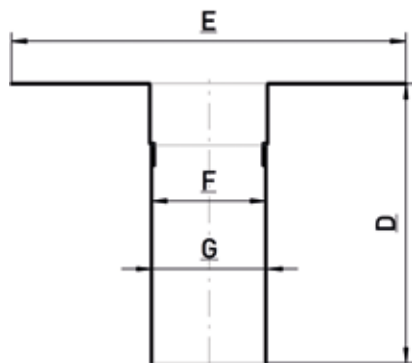

Material

PVC-U
schlagzäh, witterungsstabilisiertes
Spezial-PVC

Sonderanfertigungen

Rohrlänge von bis zu 1200 mm möglich

Anschlussmanschette

Hart-PVC

<u>Nennweite</u>	<u>D</u> (mm)	<u>E</u> (mm)	<u>F</u> (mm)	<u>G</u> (mm)
DN 50	230	322	45	50
DN 70	257	322	70	75
DN 100	255	372	105	110
DN 125	257	372	120	125
DN 150	258	400	155	160
DN 200	257	440	195	200
DN 250	258	490	245	250
DN 300	258	552	310	315